


The Art of Music Reproduction

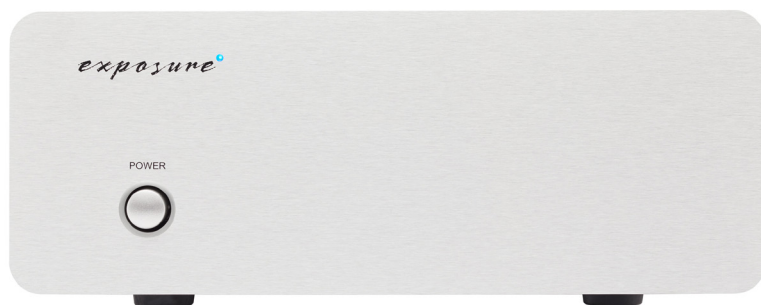

XMg Mono Amplifier

Outputs

Power Output (1kHz) :	80W per channel into 8 Ohms
Total Harmonic Distortion :	@ 1kHz, rated power : <0.005%
Frequency Response :	20Hz - 20kHz +/-0.5dB
Gain :	Unbalanced input x16, 24dB @ 1kHz
Signal to Noise, Unbalanced :	ref 1kHz & Rated Output : >95dB

Inputs

Input Sensitivity, Unbalanced :	ref 1kHz & Rated Output : 1.6V RMS
Input Impedance, Unbalanced :	>77K Ohms

General

Mains Supply :	110/120V or 220/240V, 50/60Hz (factory set)
Fuse :	T5AL for 110/120V units T2.5AL for 220/240V units
Power Consumption :	200W
Dimensions (HxWxD) :	89mm x 218mm x 348mm
Net Weight :	5kg
Gross Weight :	6kg

Features

- Large 200W custom-made toroidal power transformer
- High quality all aluminium casework and extruded front panel
- High quality resistors & capacitors used in the signal path
- Cascode circuitry utilised for improved power supply immunity
- Toshiba bipolar output transistors for dynamics and performance
- 80W per channel into 8 Ohms
- Unbalanced & balanced input selectable by internal link
- DC coupled throughout
- Electronic, non invasive current overload protection
- Bi-wire speaker outputs using high quality shrouded sockets
- Three year guarantee
- Available in black or titanium

