
SS-025
STEREO SIGNATURE AMPLIFIER





SERIES SERIES

VITUS AUDIO

The beating heart of a perfect partnership.

Quite simply, we designed our SS-025 stereo power amplifier to take the musical experience to an unprecedented level.

After all, what is the purpose of advanced electronic technology unless it is to better communicate the emotional power, subtlety and, ultimately, pleasure of musical appreciation?

In this case, the prime technological challenge was to fit enormous power within what is quite a compact chassis. Our engineering team rose to the task as they always will, and delivered an amplifier of phenomenal power, performance and (consequently) musical finesse.

The Signature Series unit was ultimately inspired by its Masterpiece Series equivalent, the formidable MP-S201, and was derived via the SM-011 to become a perfect partner to the SIA-025 Mk.II for bi-amping purposes, replacing the line-stage with a number of choice components.

It effortlessly delivers more than enough power to re-create live concert conditions in the private space, while identifying and bringing to the attention even the most minute details of the orchestration and colour palette of a recording.

Indeed, the SS-025 reconciles those two extremes of the emotional spectrum – almost limitless power on the one hand and a magical delicacy on the other.


In the words of our founder, Hans-Ole Vitus, "Musicality is at the heart of this and every component we make."

In partnership with the SIA-025 Mk.II and the SCD-025 Mk.II, this amplifier completes a three-chassis system that will last you a lifetime – one that is simple and beautiful to behold, while setting new standards in performance, quality and upgradability.


INDIT	VI Danalagua	DCA analague
INPUT	XLR analogue	RCA analogue
Available	1 L+R	1 L+R
Sensitivity	0.7 V _{RMS}	$0.7 V_{RMS}$
Impedance	10ΚΩ	10ΚΩ
OUTPUT (Each.ch)	Speaker	
Available	1	
Impedance	0.075Ω	
Power W_{RMS} (8 Ω)	~8W Class A / ~300W Class AB	
Power W_{RMS} (4 Ω)	~16W Class A / ~600W Class AB	
Frequency response	+800kHz	
Signal to noise ratio	>100dB	
THD + noise	<0.01%	
POWER CONSUMPTION		
Standby	<1W	
Class AB	90W	
Class A	150W	
DIMENSIONS		
Height	135mm including feet	
Width	435mm	
Depth	436mm / 467mm with binding posts	
Weight	37kg	



SS-025 DEVICE OVERVIEW

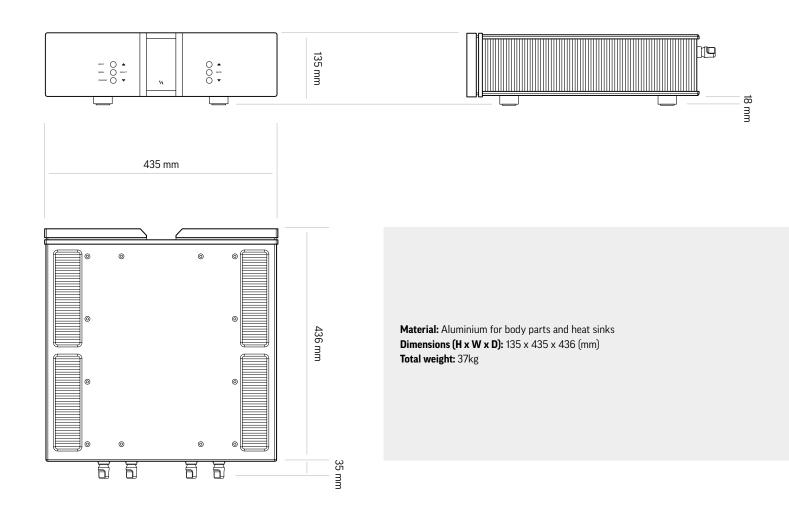



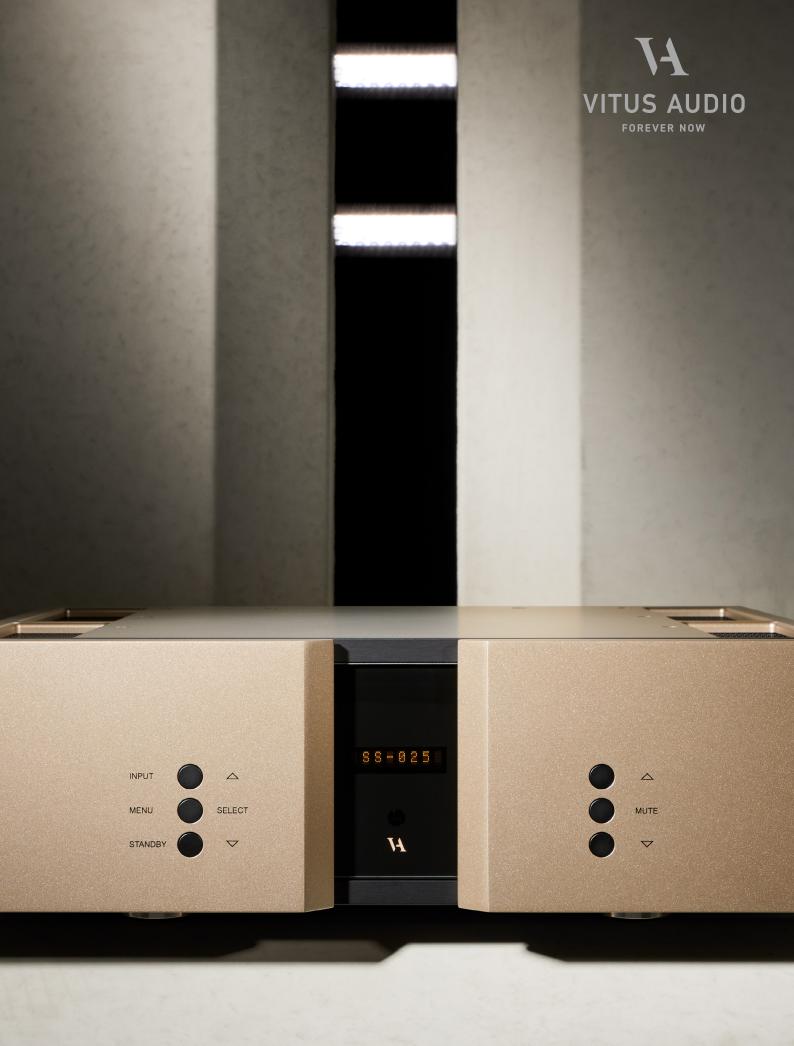

AVA Group A/S (Vitus Audio) Dueoddevej 6B, DK-7400 Herning, Denmark Tel: +45 9626 8046 Web: vitusaudio.com