

MP-I201

MASTERPIECE INTEGRATED AMPLIFIER

MASTERPIECE SERIES

INPUT



MENU



SELECT

STANDBY



MP-I201



VITUS AUDIO

FOREVER NOW

In both size and performance, the MP-I201 is probably the pinnacle of achievement in integrated amplifiers.

As has often been the case at Vitus Audio, the development of this superb amplifier was prompted by our customers, who were so impressed by the specifications of the MP-S201 stereo/mono unit that they asked us whether it would become available in integrated form.

The result is possibly the largest integrated amplifier on the market with a performance that exceeds expectations. The power handling, the resolution, the micro and macro detail of the resultant sound, are surpassed only by those of our MP-M201 Mk.II.

This stunning piece of machinery has three XLR balanced stereo inputs and 2 RCA unbalanced stereo inputs. Special tools were required to handle the manufacture of this colossal 125kg unit. While intended as a stereo integrated amplifier, mono mode is available should bi-amping be required.

Audio critic Dato Danon Han has put the MP-I201 through its paces in a full Vitus Masterpiece environment. His conclusions are of an unqualified admiration.

“I noticed that the entire range of frequencies, from the lowest low to the highest high, was both clean and clear, and packed throughout with information. In other words, I could hear the musical content as clearly and cleanly in the bass registers as I could in the treble range.

“There was that added sensation of realism with each musical instrument within an orchestra, with wave after wave of low bass information coming at me, the listener. There were dynamic impulses that I could literally feel – low bass without the ‘boom’.


“It was as real as it gets from any audio system thus far experienced by yours truly.”

INPUT	XLR	RCA
Available	3	2
Sensitivity	2&8 V _{RMS}	2&8 V _{RMS}
Impedance	10kΩ	10kΩ
OUTPUT (Each ch.)	Speaker	
Available	1	
Impedance	0.075Ω	
Power W _{RMS} (8Ω)	~25W Class A / ~500W Class AB	
Power W _{RMS} (4Ω)	~50W Class A / ~1000W Class AB	
Frequency response	+800kHz	
Signal to noise ratio	>130dB	
THD + noise	<0.01%	
VOLUME CONTROL		
Type	Relay controlled fixed resistor network	
Gain	-81dB to +11dB	
POWER CONSUMPTION		
Standby	<1W	
Full power	550W	
DIMENSIONS		
Height	445mm	
Width	505mm	
Depth	708mm	
Weight	126kg	

The MP-I201 bristles with impressive statistics: a 1.200.00uF capacitor bank, zero global negative feedback, 2mm thick boards, separated digital control circuitry, intelligent Class A bias and the signature Vitus Audio modular design.



The five inputs offer sensitivity settings between 2V_{RMS} and 8V_{RMS} that easily accommodate any available source and, as always, a true balanced configuration from input to output. Non-balanced signals (via RCA) are converted instantly to true balanced at the very first stage of the preamplifier.

The result is an even wider and deeper soundstage.

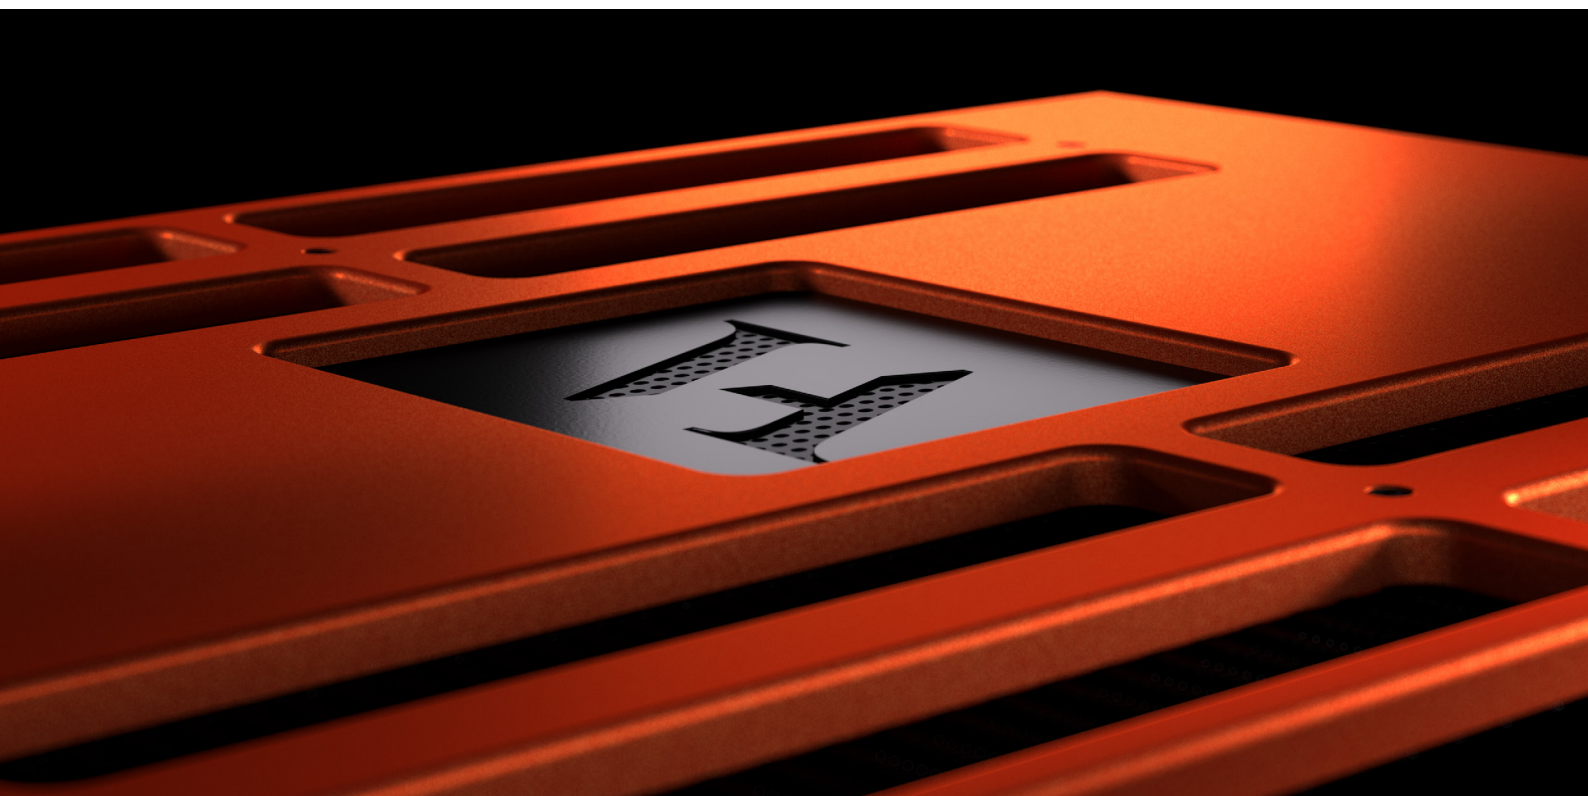

MP-I201

DEVICE OVERVIEW

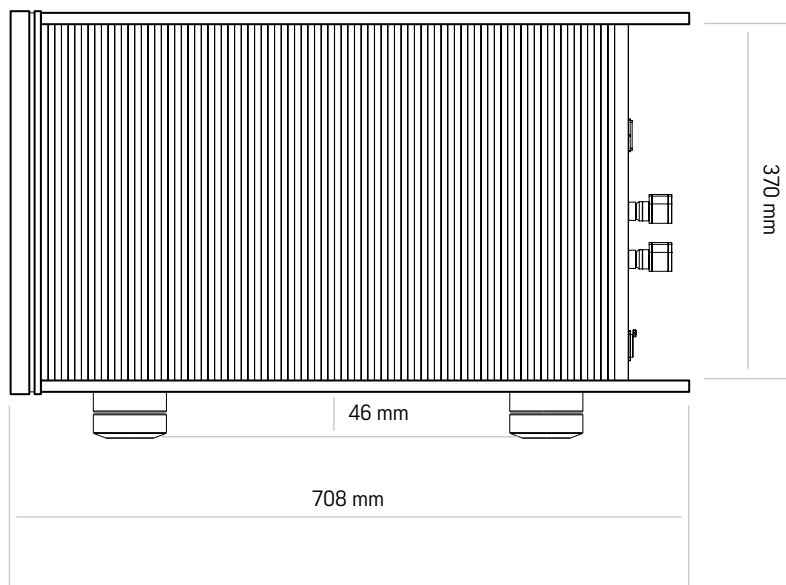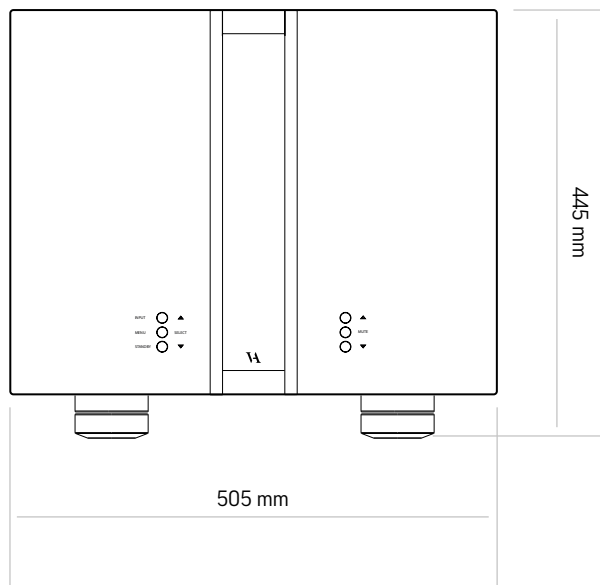


Material: Aluminium for body parts and heat sinks

Dimensions (H x W x D): 445 x 505 x 708 (mm)

Weight: 126Kg

Feet: Stillpoint Ultra 5

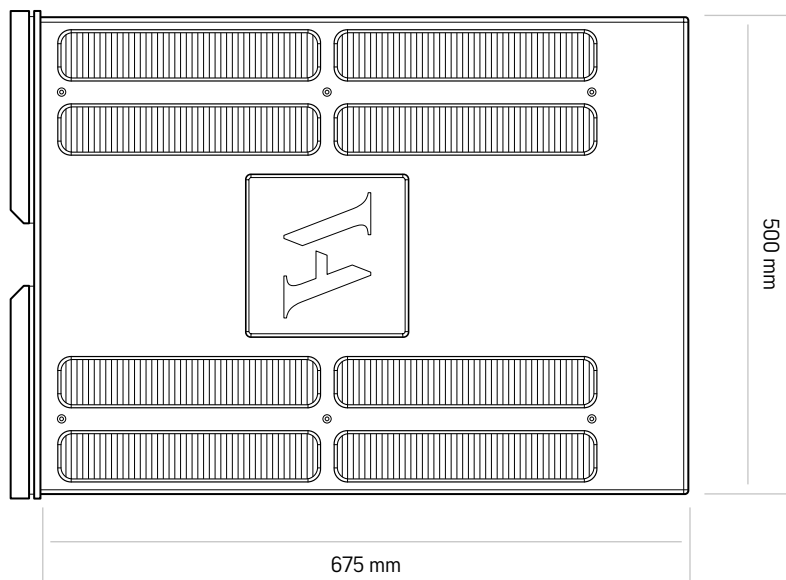



VITUS AUDIO

FOREVER NOW

