

HOME COLLECTION


2025



AUDIO SOLUTIONS
HANDCRAFTED IN FRANCE


 **FOCAL**[®]

For more than four decades, Focal has created speaker drivers and high-end loudspeakers that deliver a unique sound. Our brand values are innovation and performance; excellence and pleasure. We are globally renowned for our exclusive technologies. The result of this technological heritage is class-leading products offering a natural, authentic performance, imbued with clarity and power. With our collection of acoustic and connected loudspeakers, we bring you excellent listening quality, both in stereo and Home Cinema set ups, through solutions with an exceptional design.

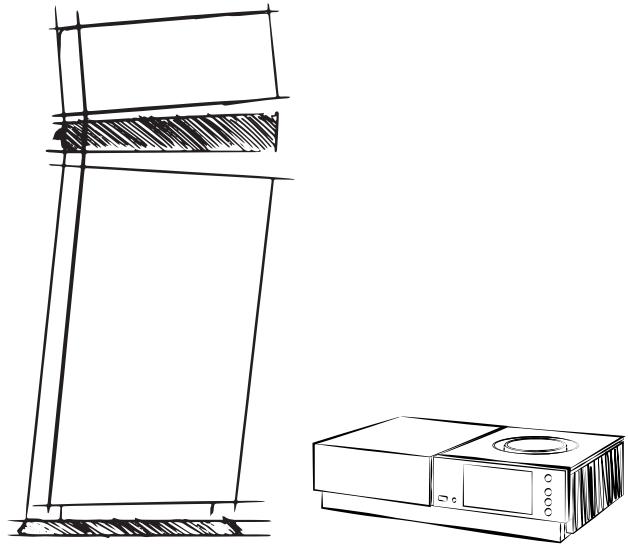

PASSIVE SPEAKERS

These require an external amplifier to function. The amplifier powers the speakers through cables and allows you to adjust the sound to suit your preferences. This is the classic choice for audiophiles, as it offers great flexibility in setting up and customising your sound system.

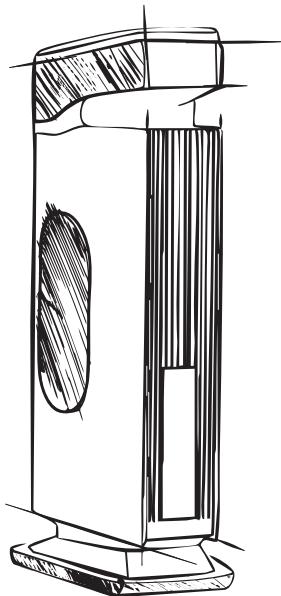

ACTIVE SPEAKERS

These have a built-in amplifier in each speaker. You simply need to connect them to an audio source (smartphone, turntable, TV, etc.) and they're ready to go. This is an ideal solution for those seeking excellent sound without additional equipment and a user-friendly setup.

01.
DIVA UTOPIA

9



02.
UTOPIA

17



03.
SOPRA

27



04.
KANTA

33



05.

ARIA EVO X



39



06.

THEVA

45



07.

SUBWOOFERS



51

08.

ASTRAL 16



55

O1.

DIVA UTOPIA

The New Hi-Fi

The Diva Utopia range brings together the best of Focal acoustics and Naim electronics in all-in-one solutions with a unique design. These Hi-Fi wireless speakers integrate powerful amplifiers, provide access to numerous streaming services, offer extensive connectivity, and are easily controlled via smartphone, remote control, or voice assistants. The sound quality, elevated by the Ultra Wideband technology, propels Hi-Fi into a new dimension.



—∞— FOCAL | DIVA UTOPIA


KEY POINTS



'W'
sandwich cone



'M'-profile
beryllium tweeter



Naim Class AB
amplification



Ultra Wideband
technology



Focal & Naim
ecosystem



Wider
connectivity





DIVA MEZZA UTOPIA

Type	3-way bass-reflex active floorstanding
Speaker drivers	Bass: 4 x 'W' 8" (20.5cm) push-push configuration Midbass: 'W' 6½" (16.5cm) with TMD® surround and NIC motor Tweeter: IAL2 1½" (27mm) pure beryllium 'M'-shaped inverted dome
Bandwidth (+/-3dB)	25Hz - 40kHz
Low-frequency cut-off (-6dB)	22Hz
Maximum volume (per pair)	120dB SPL (@ 1m)
Amplification power per speaker driver	LF: 280W Class AB - MF: 130W Class AB - HF: 90W Class AB
Power supply	110-120V/220-240V ~ 50/60Hz
Inputs	<ul style="list-style-type: none"> - WAV, FLAC and AIFF - up to 24bits/384kHz - ALAC (Apple Lossless Audio Codec) - up to 24bits/384kHz - MP3 - up to 48kHz/ 320kbps (16bits) - AAC - up to 48kHz/ 320kbps (16bits) - OGG and AAC - up to 48kHz (16bits) - DSD64 and DSD128 - Bluetooth® - aptX™ Adaptive, SBC, AAC
Audio formats	<ul style="list-style-type: none"> - WAV, FLAC and AIFF - up to 24bits/384kHz - ALAC (Apple Lossless Audio Codec) - up to 24bits/384kHz - MP3 - up to 48kHz/ 320kbps (16bits) - AAC - up to 48kHz/ 320kbps (16bits) - OGG and AAC - up to 48kHz (16bits) - DSD64 and DSD128 - Bluetooth® - aptX™ Adaptive, SBC, AAC
Multiroom	Sync up to 32 Focal & Naim streaming devices and control them from the Focal & Naim app
Wireless streaming features	
Music streaming services via the Focal & Naim app	
Wireless connection	UWB 96kHz/24bits
Connection with Hi-Res Link	192kHz/24bits
Handheld	Integrated remote control - Focal & Naim control app for iOS and Android
Remote control	Zigbee
Dimensions (HxLxD)	50 x 18½ x 24¾" (127 x 46 x 62cm)
Weight (by unit)	192lbs (90kg)
Finish	



DIVA UTOPIA

Type	3-way bass-reflex active floorstanding
Speaker drivers	Bass: 4 x 'W' 6½" (16.5cm) push-push configuration Midbass: 'W' 6½" (16.5cm) with TMD® suspension and NIC® motor Tweeter: IAL2 1½" (27mm) pure beryllium 'M'-shaped inverted dome
Bandwidth (+/-3dB)	27Hz - 40kHz
Low-frequency cut-off (-6dB)	24Hz
Maximum volume (per pair)	116dB SPL (@ 1m)
Amplification power per speaker driver	LF: 250W Class AB - MF: 75W Class AB - HF: 75W Class AB
Power supply	110-120V/220-240V ~50/60Hz
Inputs	
Audio formats	- WAV, FLAC and AIFF - up to 24bits/384kHz - ALAC (Apple Lossless Audio Codec) - up to 24bits/384kHz - MP3 - up to 48kHz/ 320kbps (16bits) - AAC - up to 48kHz/ 320kbps (16bits) - OGG and AAC - up to 48kHz (16bits) - DSD64 and DSD128 - Bluetooth® - aptX™ Adaptive, SBC, AAC
Multiroom	Sync up to 32 Focal & Naim streaming devices and control them from the Focal & Naim app
Wireless streaming features	
Music streaming services via the Focal & Naim app	
Wireless connection	UWB 96kHz/24bits
Connection with Hi-Res Link	192kHz/24bits
Handheld	Integrated remote control - Focal & Naim control app for iOS and Android
Remote control	Zigbee
Dimensions (HxLxD)	47½ x 16½ x 22" (121 x 42 x 56cm)
Weight (by unit)	141lbs (64kg)
Finish	
Optional finishes	

*The Diva Utopia range is exclusively available in Focal Powered by Naim stores.





- 15 - FOCAL | DIVA UTOPIA

02.

UTOPIA

The legend continues

The embodiment of Focal excellence, the Utopia III Evo line is distinguished by its incredible silhouette, cutting-edge, exclusive technology, finishes inspired by the luxury car industry and, of course, the unrivalled listening experience they deliver. They are also home to the best components of their generation. Utopia is an icon, and still streets ahead of the rest.



-17- FOCAL | UTOPIA

KEY POINTS



'W' sandwich cone



Pure Beryllium tweeter



TMD® suspension



Power Flower™
technology



Focus
Time



Large laminar
vent

— 10 — FOCAL | UTOPIA





GRANDE UTOPIA EM EVO

The ultimate sound

Grande Utopia has left an indelible mark with each generation; it is Focal's most successful concept. With its exceptional performance and unique style, it is no longer simply a monument to technology, it is also a sound sculpture. Each speaker driver is housed inside a separate box. These boxes make up the spectacular spinal column of the loudspeaker and can be tilted by a dedicated handle. This adjustable 'Focus Time' function means you can achieve an absolutely perfect sound image based on the configuration of your room.



Carrara
White



Black
Lacquer



Ash
Grey



Hot
Chocolate



Noyer
Naturel



Noyer
Foncé



GRANDE UTOPIA EM EVO

Type	4-way bass-reflex floorstanding loudspeaker	3-way bass-reflex floorstanding loudspeaker
Drivers	<ul style="list-style-type: none"> Electromagnetic 16" (40cm) 'W' Woofer Multiferrite 11" (27cm) 'W' Low-Mid Woofer 2 x 6½" (16.5cm) 'W' Midrange Power Flower™ with TMD® suspension and NIC® motor 1" (27mm) IAL2 pure Beryllium inverted dome tweeter 	<ul style="list-style-type: none"> Electromagnetic 13" (33cm) 'W' Woofer 2 x 6½" (16.5cm) 'W' Midrange Power Flower™ with TMD® suspension and NIC® motor 1" (27mm) IAL2 pure Beryllium inverted dome tweeter
Frequency response	18Hz - 40kHz	22Hz - 40kHz
Low frequency point (-6dB)	14Hz	18Hz
Crossover frequency	80 / 220 / 2,300Hz	230 / 2,200Hz
Sensitivity (2.83V/1 m)	94dB	94dB
Nominal impedance	8Ω (min 3Ω)	8Ω (min 2.8Ω)
Recommended amplifier power	50 - 1.500W	50 - 1.000W
Dimensions (HxWxD)	7⅞ x 25¾ x 34⅝" (201 x 65.4 x 88cm)	61⅜ x 21¾ x 32⅝" (155.8 x 55.3 x 83cm)
Weight (by unit)	584lbs (265kg)	375lbs (170kg)
Finishes		



MAESTRO UTOPIA EVO

3-way bass-reflex
floorstanding loudspeaker

- 11" (27cm) 'W' Woofer with a Magnetic Damping System (MDS)
- 11" (27cm) 'W' Woofer Power Flower™
- 6½" (16,5cm) 'W' Midrange with TMD® suspension and NIC® motor
- 1" (27mm) IAL2 pure Beryllium inverted dome tweeter

25Hz - 40kHz

21Hz

280 / 2,200Hz

93dB

8Ω (min 3.1Ω)

50 - 600W

57⅞ x 17⅞ x 30⅜"
(147 x 45.5 x 77cm)

256lbs (116kg)



SCALA UTOPIA EVO

3-way bass-reflex
floorstanding loudspeaker

- 11" (27cm) 'W' Woofer Power Flower™
- 6½" (16,5cm) 'W' Midrange with TMD® suspension and NIC® motor
- 1" (27mm) IAL2 pure Beryllium inverted dome tweeter

27Hz - 40kHz

24Hz

220 / 2,400Hz

92dB

8Ω (min 3.2Ω)

50 - 500W

(49⅛ x 15½ x 26⅓")
124.7 x 39.3 x 67cm

187lbs (85kg)





DIABLO UTOPIA COLOUR EVO

Type 2-way bass-reflex compact bookshelf loudspeaker

Drivers

- 6½" (16.5cm) 'W' Midbass Power Flower™
- 1" (27mm) IAL2 pure Beryllium inverted dome tweeter

Frequency response 44Hz - 40kHz

Low frequency point (-6dB) 40Hz

Crossover frequency 2,200Hz

Sensitivity (2.83V/1 m) 89dB

Nominal impedance 8Ω (min 4Ω)

Recommended amplifier power 25 - 200W

Dimensions (HxWxD) 17 x 10⅓ x 16⅔"
(43.1 x 25.8 x 42.7cm)

Weight (by unit) 44lbs (20kg)

Finishes

VIVA/VIVA CENTER UTOPIA COLOUR EVO

Type 3-way LCR bass-reflex loudspeaker

Drivers

- 2 x 8" (21cm) 'W' Woofers
- 6½" (16.5cm) 'W' Midrange Power Flower™
- 1" (27mm) IAL2 pure Beryllium inverted dome tweeter

Frequency response 39Hz - 40kHz

Low frequency point (-6dB) 34Hz

Crossover frequency 270/ 2,200Hz

Sensitivity (2.83V/1 m) 92dB

Nominal impedance 8Ω (min 3.2Ω)

Recommended amplifier power 50 - 600W

Dimensions (HxWxD) 37⅛ x 12⅓ x 20⅓"
(94.2 x 32.2 x 51cm)

Weight (by unit) 125lbs (57kg)

Finishes



**SUB UTOPIA EM
COLOUR EVO**

Subwoofer (see p.53)



**DIABLO UTOPIA
COLOUR EVO STAND**

Height: 24" (60cm)
Graphite Black finish



**VIVA / VIVA CENTER
UTOPIA COLOUR EVO STAND**

Height: 16" (40cm)
Graphite Black finish

03. SOPRA

Revealing the invisible

The Sopra loudspeakers push back the limits of sound reproduction in terms of transparency, of precision, and harmonic richness. They gloriously release the essence of music: you will feel like you are listening to some sounds for the very first time... With its sleek design and its compactness, the Sopra range is a delight for aesthetes of form and sound.



FINISHES



Carrara
White



Electric
Orange



Black
Lacquer



Light
Oak



Macassar


KEY POINTS



'W' sandwich
cone



Pure Beryllium
IHL tweeter



TMD®
suspension



NIC
technology





	SOPRA N°3	SOPRA N°2	SOPRA N°1
Type	3-way bass-reflex floorstanding loudspeaker	3-way bass-reflex floorstanding loudspeaker	2-way bass-reflex bookshelf loudspeaker
Drivers	<ul style="list-style-type: none"> • 2 x 8" (21cm) 'W' Woofer with NIC® motor • 6½" (16.5cm) 'W' Midrange with TMD® suspension and NIC® motor • 1" (27mm) IHL pure Beryllium inverted dome tweeter 	<ul style="list-style-type: none"> • 2 x 7" (18cm) 'W' Woofer with NIC® motor • 6½" (16.5cm) 'W' Midrange with TMD® suspension and NIC® motor • 1" (27mm) IHL pure Beryllium inverted dome tweeter 	<ul style="list-style-type: none"> • 6½" (16.5cm) 'W' Midbass with TMD® suspension and NIC® motor • 1" (27mm) IHL pure Beryllium inverted dome tweeter
Frequency response	33Hz - 40kHz	34Hz - 40kHz	45Hz - 40kHz
Low frequency point (-6dB)	26Hz	28Hz	41Hz
Crossover frequency	250 / 2,200Hz	250 / 2,200Hz	2,200Hz
Sensitivity (2.83V/1 m)	91,5dB	91dB	89dB
Nominal impedance	8Ω (min 3.1Ω)	8Ω (min 3.1Ω)	8Ω (min 3.9Ω)
Recommended amplifier power	40 - 400W	40 - 300W	25 - 150W
Dimensions (HxWxD)	49½ x 15¾ x 23½" (126.4 x 40.2 x 59.5cm)	46¾ x 14⅓ x 21¼" (119 x 35.8 x 54cm)	16¾ x 11 x 15¾" (42.5 x 27.9 x 39.6cm)
Weight (by unit)	154lbs (70kg)	121lbs (55kg)	42lbs (19kg)
Finishes			



SOPRA CENTER

3-way bass-reflex center loudspeaker

- 2 x 6½" (16.5cm) 'W' Woofers
- 3" (8cm) 'W' Midrange
- 1" (27mm) IHL pure Beryllium inverted dome tweeter

55Hz - 40kHz

50Hz

500 / 2,200Hz

91dB

8Ω (min 4.1Ω)

40 - 200W

9¼ x 24 x 13¾"
(23.5 x 60.9 x 35cm)

121lbs (19kg)



SOPRA SURROUND BE

2-way sealed bipolar surround loudspeaker

- 2 x 6½" (16.5cm) 'W' Midbass
- 2 x 1" (27mm) IHL pure Beryllium inverted dome tweeter

72Hz - 40kHz

59Hz

2,400Hz

91dB

4Ω / 8Ω (min 3Ω / 6Ω)
(bipolar/monopolar))

40 - 200W

15¾ x 16⅞ x 7½"
(39 x 43 x 19cm)

28lbs (13kg)



SW 1000 BE

Subwoofer (see p.53)



SOPRA STAND

Height: 24" (60cm)
Graphite Black finish

04.

KANTA

Performance meets style

Kanta is all about superb performance in an even more tightly controlled space. Precision, detail, warmth and musical sounding are its key sound characteristics. The range also stands out for its modern design and decidedly disruptive aesthetics. The front panels of its four models, in either a lacquered or a matte finish, offer various combination options to cater to all tastes and to suit diverse environments.



FINISHES



Black Lacquer
Black Mat



White High Gloss
White Mat



Walnut High Gloss
Black Mat



Walnut High Gloss
Ivory Mat

KEY POINTS



Flax
cone



Beryllium
tweeter



TMD®
suspension



Focus
Time





	KANTA N°3	KANTA N°2	KANTA N°1
Type	3-way bass-reflex floorstanding loudspeaker	3-way bass-reflex floorstanding loudspeaker	2-way bass-reflex bookshelf loudspeaker
Drivers	<ul style="list-style-type: none"> • 2 x 8" (21 cm) Flax bass with NIC® motor • 6½" (16.5 cm) Flax Midrange with TMD® suspension and NIC® motor • 1" (27mm) IAL3 pure Beryllium inverted dome tweeter 	<ul style="list-style-type: none"> • 2 x 6½" (16.5cm) Flax Woofer with NIC® motor • 6½" (16.5cm) Flax Midrange with TMD® suspension and NIC® motor • 1" (27mm) IAL3 pure Beryllium inverted dome tweeter 	<ul style="list-style-type: none"> • 6½" (16.5 cm) Flax Midbass with TMD® suspension and NIC® motor • 1" (27 mm) IAL3 pure Beryllium inverted dome tweeter
Frequency response	33Hz - 40kHz	35Hz - 40kHz	46Hz - 40kHz
Low frequency point (-6dB)	26Hz	29Hz	42Hz
Crossover frequency	250 / 2,500Hz	260 / 2,700Hz	2,400Hz
Sensitivity (2.83V/1 m)	91dB	91dB	88dB
Nominal impedance	8Ω (min 3Ω)	8Ω (min 3.1Ω)	8Ω (min 3.9Ω)
Recommended amplifier power	40 - 400W	40 - 300W	25 - 150W
Dimensions (HxWxD)	50¾ x 15¼ x 20½" (128 x 38.6 x 52cm)	44 x 12¾ x 18¾" (111.8 x 32.1 x 47.7cm)	16½ x 9¼ x 15¾" (42.2 x 23.4 x 39cm)
Weight (by unit)	101lbs (46kg)	77lbs (35kg)	29lbs (13kg)
Finishes			



KANTA CENTER

2-way bass-reflex
center loudspeaker

- 6½" (16.5 cm) Flax
Midbass with TMD®
suspension and NIC® motor
- 1" (27 mm) IAL3
pure Beryllium inverted
dome tweeter

55Hz - 40kHz

50Hz

2,400Hz

91dB

8Ω (min 3.5Ω)

40 - 200W

9½ x 22 x 15¾"
(24.6 x 56.1 x 39cm)

40lbs (18kg)



SUB 1000 F

Subwoofer (see p.53)



KANTA N°1 STAND

Adjustable height from
24" to 25" (61.5 to 64.1cm)
Graphite Black finish

KANTA CENTER STAND

Adjustable height from
16.5" to 17.5" (42.4 to 45cm)
Graphite Black finish

05.

ARIA EVO X

High Fidelity guaranteed

In an embodiment of expressive high fidelity, Aria Evo X preserves the DNA of Aria 900 while reinventing itself ten years on. The midrange and bass speaker drivers retain the unrivalled flax cone, which delivers a natural sound, while the 'M'-shaped TAM tweeter reproduces a broad spectrum of frequencies and offers a wide diffusion angle. A line that delivers sublime design with sophisticated and contemporary finishes, the Aria Evo X will delight music lovers and Home Cinema fans alike.



-39- FOCAL | ARIA EVO X

FINISHES



Black
High Gloss



Moss Green
High Gloss



Prime
Walnut

KEY POINTS



Flax
cone



TAM
Tweeter



Multi-port
Powerflow system



Leather effect
front panel





	ARIA EVO X N°4	ARIA EVO X N°3	ARIA EVO X N°2
Type	3-way bass-reflex floorstanding loudspeaker	3-way bass-reflex floorstanding loudspeaker	3-way bass-reflex floorstanding loudspeaker
Drivers	<ul style="list-style-type: none"> • 2 x 8" (21cm) Flax Woofer • 6½" (16.5cm) Flax Midrange with TMD® suspension • 1" (25mm) TAM Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 3 x 6½" (16.5cm) Flax Woofer • 6½" (16.5cm) Flax Midrange with TMD® suspension • 1" (25mm) TAM Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 2 x 6½" (16.5cm) Flax bass • 6½" (16.5cm) Flax Midrange with TMD® suspension • 1" (25mm) TAM Al/Mg inverted dome tweeter
Frequency response	37Hz - 30kHz	39Hz - 30kHz	45Hz - 30kHz
Low frequency point (-6dB)	31Hz	32Hz	37Hz
Crossover frequency	280 / 2,600Hz	260 / 3,100Hz	290 / 2,400Hz
Sensitivity (2.83V/1 m)	92.5dB	92dB	91.5dB
Nominal impedance	8Ω (min 2.5Ω)	8Ω (min 2.8Ω)	8Ω (min 2.9Ω)
Recommended amplifier power	40 - 350W	40 - 300W	40 - 250W
Dimensions (HxWxD)	45¼ x 14⅝ x 16⅓" (115 x 37.1 x 42cm)	45¼ x 11⅝ x 14⅓" (115 x 29.4 x 37.1cm)	40⅜ x 11⅝ x 14⅓" (103.5 x 29.4 x 37.1cm)
Weight (by unit)	77lbs (35kg)	64lbs (29kg)	55lbs (25kg)
Finishes			



ARIA EVO X N°1

2-way bass-reflex bookshelf loudspeaker

- 6½" (16.5cm) Flax Midbass with TMD® suspension
- 1" (25mm) TAM Al/Mg inverted dome tweeter

55Hz - 30kHz

47Hz

2,800Hz

89.5dB

8Ω (min 4.6Ω)

25 - 120W

15¾ x 8⅞ x 11"
(39 x 22.5 x 28cm)

19lbs (8.5kg)



ARIA EVO X CENTER

2-way bass-reflex center loudspeaker

- 2 x 6½" (16.5cm) Flax Midbass with TMD® suspension
- 1" (25mm) TAM Al/Mg inverted dome tweeter

57Hz - 30kHz

50Hz

2,800Hz

91dB

8Ω (min 4.3Ω)

40 - 200W

7⅜ x 21 x 9⅝"
(20 x 53.3 x 24.5cm)

23lbs (10.5kg)



ARIA SR 900

2-way sealed bipolar surround loudspeaker

- 2 x 5" (13cm) Flax Midbass
- 2 x 1" (25mm) TNF Al/Mg inverted dome tweeter

85Hz - 28Hz

67Hz

2,200Hz

90dB

8Ω (min 3.6Ω)

25 - 120W

11¾ x 15¾ x 6⅓"
(29.5 x 40 x 17cm)

12lbs (6kg)



SUB 1000 F

Subwoofer (see p.53)



STAND ARIA S 900

Aria Evo X N°1 compatible
Height: 24" (60cm)
Aluminium finish

06.

THEVA

Experience High Fidelity

Generous and assertive, the Theva loudspeakers promise to bring pure musical and Home Cinema experiences into your home. Packed with exclusive Focal technologies like the Slatefiber cone, they boast elegant and modern finishes as well as meticulous details for a refined look that blends seamlessly into any interior. They combine impressive sound performance and outstanding design, embodying the best way to experience High-Fidelity.



FINISHES



Black
High Gloss



Light
Wood



Dark
Wood

KEY POINTS



Slatefiber
cone



Al/Mg
TNF Tweeter



Dolby Atmos®
effects



Time
Alignment





	THEVA N°3-D	THEVA N°3	THEVA N°2	THEVA N°1
Type	3-way bass-reflex floorstanding loudspeaker - 1-way sealed	3-way bass-reflex floorstanding loudspeaker	3-way bass-reflex floorstanding loudspeaker	2-way bass-reflex bookshelf loudspeaker
Drivers	<ul style="list-style-type: none"> • 2 x 6½" (16.5cm) Slatefiber Woofer • 6½" (16.5cm) Slatefiber Midrange • 1" (25mm) TNF Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 2 x 6½" (16.5cm) Slatefiber Woofer • 6½" (16.5cm) Slatefiber Midrange • 1" (25mm) TNF Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 2 x 5" (13cm) Slatefiber Woofer • 5" (13cm) Slatefiber Midrange • 1" (25mm) TNF Al/Mg inverted dome tweeter 	<ul style="list-style-type: none"> • 6½" (16.5cm) Slatefiber Midbass • 1" (25mm) TNF Al/Mg inverted dome tweeter
Frequency response	48Hz - 28kHz Atmos: 100Hz - 20kHz	48Hz - 28kHz	53Hz - 28kHz	58Hz - 28kHz
Low frequency point (-6dB)	39Hz Atmos: 90Hz	39Hz	45Hz	49Hz
Crossover frequency	270 / 2,700Hz	270 / 2,700Hz	280 / 2,900Hz	3,000Hz
Sensitivity (2.83V/1 m)	91dB	91dB	90dB	89dB
Nominal impedance	8Ω (min 2.9Ω) Atmos: 6Ω	8Ω (min 2.9Ω)	8Ω (min 2.9Ω)	8Ω (min 4.6Ω)
Recommended amplifier power	40 - 250W	40 - 250W	40 - 200W	25 - 120W
Dimensions (HxWxD)	40½ x 8¾ x 15¼" (101.9 x 21.2 x 38.8cm)	39 x 8¾ x 15¼" (98.9 x 21.2 x 38.8cm)	36½ x 7½ x 13¾" (93.1 x 19.1 x 35.2cm)	15¾ x 8¾ x 10¼" (39.2 x 21.2 x 26cm)
Weight (by unit)	48lbs (22kg)	44lbs (20kg)	37lbs (17kg)	15lbs (7kg)
Finishes				



THEVA CENTER

2-way sealed center loudspeaker



THEVA SURROUND

2-way sealed surround loudspeaker

- 2x 6½" (16.5cm) Slatefiber Midbass
- 1" (25mm) TNF Al/Mg inverted dome tweeter
- 2x 6½" (16.5cm) Slatefiber Midbass
- 1" (25mm) TNF Al/Mg inverted dome tweeter

59Hz - 28kHz

80Hz - 28kHz

51Hz

67Hz

2,100Hz

3,000Hz

91dB

89dB

8Ω (min 3.8Ω)

8Ω (min 4.5Ω)

40 - 200W

25 - 100W

8½ x 20⅞ x 10"
(21 x 53 x 25cm)

17½ x 12⅝ x 4"
(44.3 x 31.6 x 10.7cm)

22lbs (10kg)

11lbs (5.5kg)



SUB 600P

Subwoofer (see p.53)



THEVA N°1 STAND

Height: 21¾ (55cm)
Black finish



THEVA CENTER STAND

Height: 17¾ (45cm)
Black finish

07. SUBWOOFERS

Dynamics, impact and power

The subwoofer is a major component of any audio installation, providing dynamics and intensity. With their sleek design, Focal subwoofers offer a deep, impactful and powerful bass. They effectively complement a wide range of configurations, from the most sophisticated Home Cinema installations to compact systems. All you have to do is choose the subwoofer for you!

- 51 - FOCAL | SUBWOOFERS





SUB UTOPIA EM COLOUR EVO

SW 1000 BE

Type	Stackable passive subwoofer	Active bass-reflex subwoofer	
Drivers	<ul style="list-style-type: none">Electromagnetic 13" (33cm) 'W' Bass driverStackable (up to 3 subwoofers tall)Almost 130dB SPL at 1m (in a corner)	13" (33cm) 'W' Woofer	
Frequency response	22Hz - 500Hz	20Hz - 150Hz	
Low frequency point (-6dB)	19Hz	18Hz	
Sensitivity (2.83V/1m)	93dB	<ul style="list-style-type: none">LFE/Stereo/Digital inputsAdjustable LPF: 50Hz to 150Hz (24dB/oct.), 48dB/oct.Adjustable subsonic filter3 user memoriesNight mode and Boost modeAutopower	
Functions	Nominal impedance	8Ω (min 5.5Ω)	8Ω (min 5.5Ω)
	Recommended amplifier power	500 - 1.000W	500 - 1.000W
Amplifier power	-	600W BASH® amplifier	
Dimensions (HxWxD)	24¾ x 19 x 24⅝" (63 x 48 x 62cm)	21 x 19¾ x 16⅞" (53.5 x 50 x 43cm)	
Net weight (by unit)	159lbs (72kg)	92lbs (42kg)	
Finishes			



SUB 1000F

Active sealed subwoofer



SUB 600P

Active closed subwoofer

12" (30cm) Flax Woofer

12" (30cm) Polyflex Woofer

24Hz - 160Hz

28Hz - 270Hz

22Hz

26Hz

- LFE/Stereo inputs
- Adjustable subsonic filter:
40 to 160Hz/12dB/Oct
- Phase inverter:
0 - 180°
- Autopower

- RCA input:
Right, left, LFE
- Crossover Frequency:
Variable 40 - 200Hz (LFE)
- Phase inverter:
0 - 180°
- Auto Standby
enable / disable

1000W
BASH® amplifier

600W Dynamic
300W RMS

16½ x 15¾ x 16½"
(42 x 40 x 42cm)

15¾ x 15¾ x 16¾"
(40 x 40 x 42.5cm)

47lbs (21.5kg)

46lbs (21kg)



08.

ASTRAL 16

Sound immersion

Astral 16 is a 16-channel audio-video processor and amplifier that allows you to get the best from your loudspeakers. Compatible with Control4, Crestron, Savant and RTI, this cutting-edge electronic device incorporates 12 class-D amplifier channels and handles all audio formats (Dolby Atmos®, DTS:X™ etc.). You can control whichever system you want by room via a simple app, enjoy access to technical support at any time and customise your system as desired.



KEY POINTS




Audio-video
processor



Home Cinema &
Multiroom



Dolby Atmos®
DTS:X™ - Auro-3D®



Upgradable
product





ASTRAL 16


Type	16 channel audio-video processor and amplifier	
	<ul style="list-style-type: none"> • Compatible formats • Compatible formats 	Dolby Atmos® / DTS:X™ / Auro-3D® Powered by Dirac Live®: target curve editable from 20Hz to 20kHz for all channels (including subwoofers), phase correction full bandwidth 20Hz - 20kHz on all channels (including subwoofers)
Main features	<ul style="list-style-type: none"> • 'Remote Monitoring' function 	
Multichannel / Surround Processing	<ul style="list-style-type: none"> • Output channels • Decoding / upmixing channels • Input sampling rate supported • Stereo downmix • Bass management • Multi-subwoofer channels • Multi-way crossover • 20 Parametric EQ per channel 	
HDMI	<ul style="list-style-type: none"> • HDMI inputs • HDMI outputs (mirror) • Supported video format • High Dynamic Range • Color Space and Subsampling • Deep Color • Max resolution supported • HDMI 	
Audio Inputs	<ul style="list-style-type: none"> • Digital input • Analog stereo inputs 	
Amplified Audio Outputs	<ul style="list-style-type: none"> • Amplified main outputs • Analog main outputs, balanced • Stereo downmix outputs, balanced • Technology • Amplified channels • Continuous power output, per channel, to 0.1%THD • 3 channels driven simultaneous • 6 channels driven simultaneous • 12 channels driven simultaneous 	

Set-Up Management	<ul style="list-style-type: none"> Configurable multi-theater management Configurable audio zones management Unlimited Theater and audio zones listening presets Backup and restore of set-up Firmware update via USB/network 	
Control Inputs and Outputs	• USB type A	2
	• Ethernet	
	• Trigger	4 (out)
	• IR remote ports, in/out	1 / 1
Control and custom Installation	• Web-based product configurator	
	• TCP/IP API based control	
	• Focal Remote iPad® control application	
	• Home automation	Control4, Crestron, RTI and Savant
	• Front panel display	TFT 4.3"
Power Supply	• Voltage range	100V to 240V
	• Type	SMPS
	• Range selection	Universal
Supplied with	<ul style="list-style-type: none"> Calibrated measurement microphone and tripod Dirac Live® license 32.9ft (10m) cable with infra-red detector Mounting kit 	
Dimensions with stands (HxWxD)	7½ x 18⅞ x 19¼" (19.1 x 47.9 x 49cm)	
Weight	Weight with stands	44.1lbs (20kg)
	Weight with accessories for Rack	50.7lbs (23 kg)

FOCAL & NAIM

Complete systems

With Focal and Naim's products, you can enjoy complete solutions. Our loudspeakers are designed to reveal a pure sound, the embodiment of the spirit of High Fidelity. The Naim electronic ranges (all-in-one players, streaming products, amplifiers, power supply, integrated solutions...) allow you to take full advantage of the loudspeakers' performance, and are a simple way of managing your music from a single source: access integrated streaming services (Spotify, TIDAL, Qobuz, etc.), improve the sound of your TV, and more.



Focal
loudspeakers



Naim
electronics



Matching
cables

THEVA N°3
& UNITI ATOM



ARIA EVO X N°1
& UNITI ATOM



KANTA N°1
& UNITI STAR



KANTA N°2
& UNITI NOVA



SOPRA N°2
& UNITI NOVA PE



—> — FOCAL & NAIM | SOLUTIONS

SCALA UTOPIA EVO
& 300 SERIES





DIVA UTOPIA



INNOVATION

'Spoiler alert—
they sound superb'

WIRED



'Disruptive in every way,
and desirable too'

DIAPASON D'OR



UTOPIA



'Musically, audiophiles could not ask
for anything more than the Grande'

AUDIOPHILIA

'The Stellas are really bespoke loudspeakers,
and to me, musical works of art'

TONE PUBLICATIONS



'With all that grace, power, and finesse on tap,
when it comes to music the Maestro is a genuinely do it all performer'

HIFI PLUS





SOPRA



'The Sopra N°2 is literally
and figuratively
an impressive loudspeaker'

THE EAR



'It's difficult to live without it'

SOUND STAGE HIFI



KANTA



'The Focal Kanta N°3
delivers terrific sound quality and
a stylish design for its price'

WHAT HI-FI

AVFORUMS

'Tonally, the Focal
is absolutely magnificent'

AVFORUMS





ARIA EVO X



'Bright, transparent
and brilliant in every way'

BLOG SON VIDÉO

'We've retained
the original soul and charm
of the Aria range while
enjoying a smoother
and fuller signal'

LES ANNÉES LASER



'Focal are the speaker company winning
2024 with the introduction of its new
Aria Evo X range'

TECHRADAR



THEVA



'Big, confident
and engaging sound'

HI-FI CHOICE

'Wide and dimensional stereo imaging.
Great balance and fluidity across registers.
Warm midrange, creamy treble.
Impressive dynamics.'

WIRED

'There's dexterity and detail
on offer here that brings
music to life'

AVFORUMS



ASTRAL 16



'An experience that was spine-tingling'

HOME CINEMA CHOICE

'This is high-end
hardware fit
for the finest of setups'

AVTECH MEDIA



COLLECTIONS

Combining performance and design, Focal's collections are a revelation, awakening the emotions : at home with hi-fi, connected loudspeakers, Home Cinema systems and open-/closed-back headphones; on the go with incar kits; during travel with Bluetooth® Noise Cancelling Headphones; in the studio with monitors and professional headphones ; for outdoor spaces and at sea with yacht solutions.



Home Collection



Motorities Collection




Professional Collection



Enjoy an incredible sound experience

Find our products in 10,000 retail partner stores across the world, but also in our Focal Powered by Naim shops. These stores, dedicated to our brands, invite you to dive into our world, our savoir-faire and immerse yourself in the Focal & Naim sound.

www.focalpoweredbynaim.com

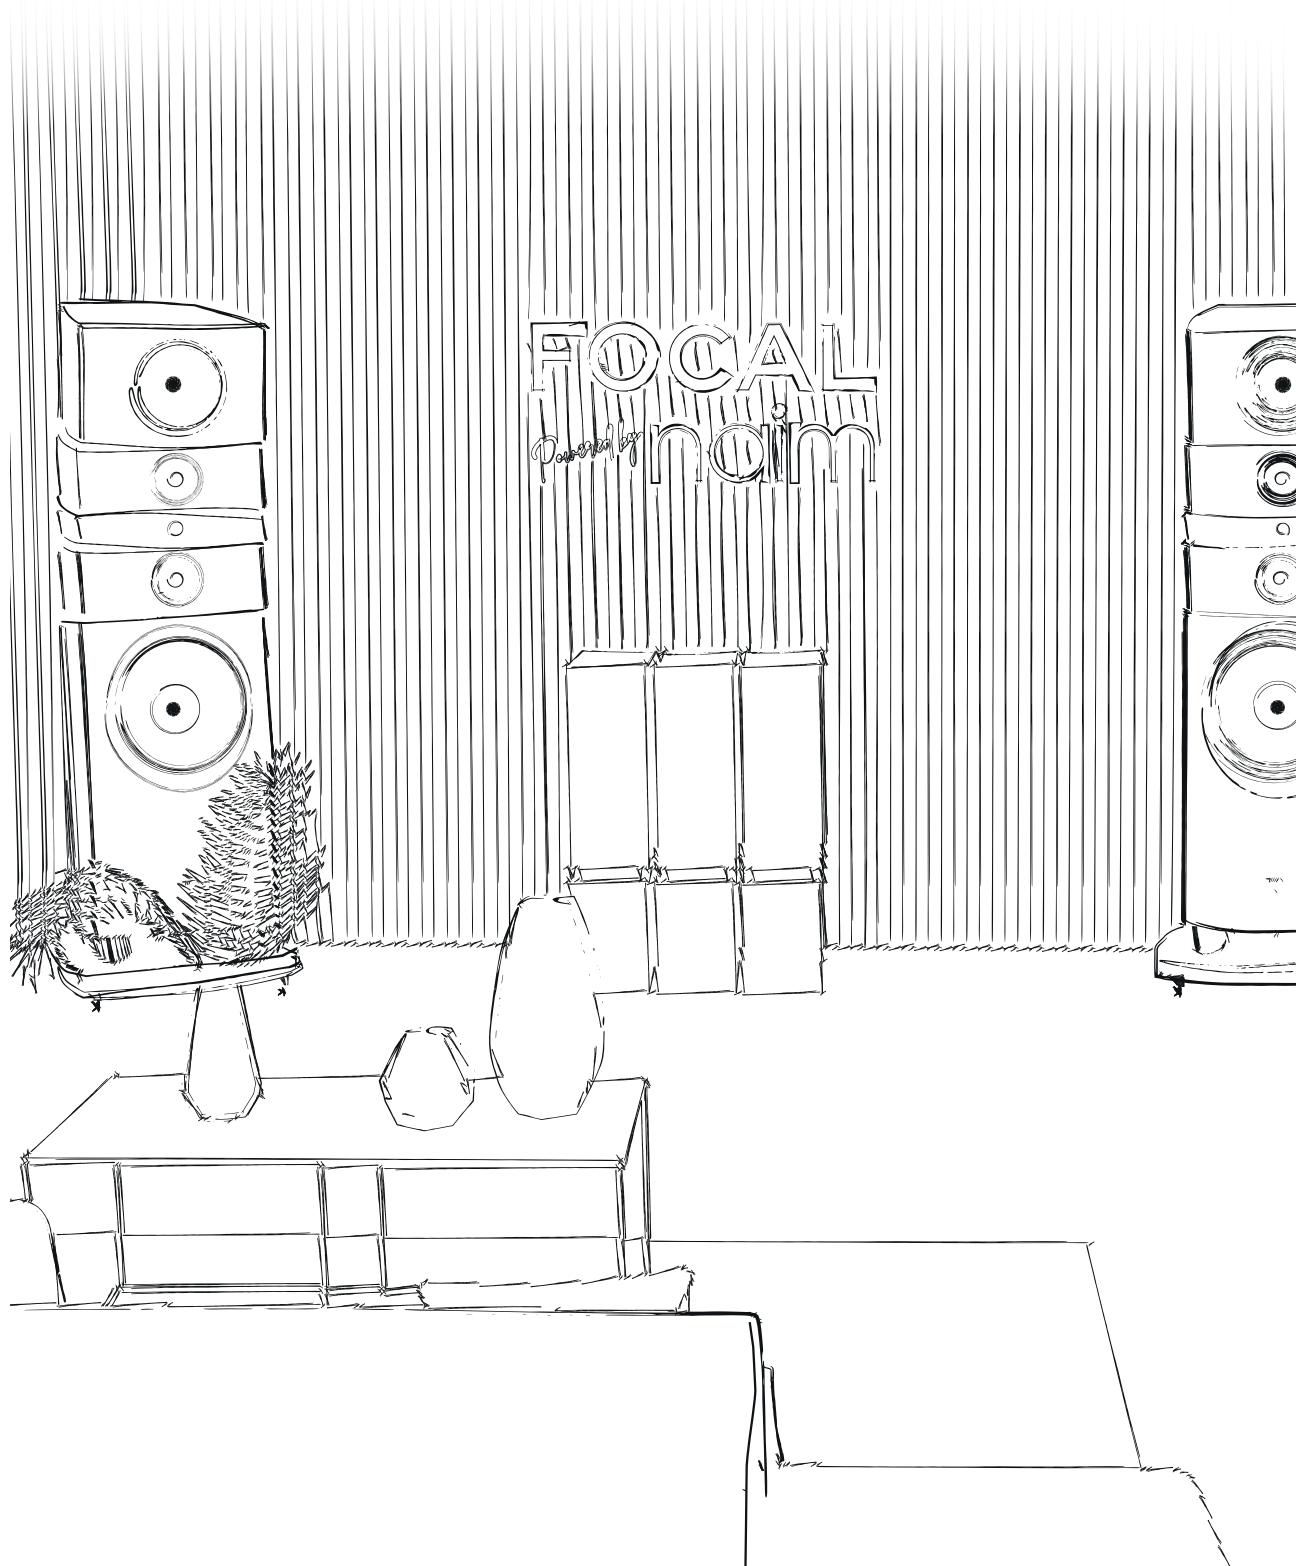

For more information, find us at:



Focal JMLab®

BP 374 - 108, rue de l'Avenir - 42353 La Talaudière cedex - France - +33 (0) 477 435 700

Focal® is a registered trademark of Focal JMLab®, Naim® is a registered trademark of Naim Audio®.

Due to constant technological advances, Focal JMLab® and Naim Audio® reserve the right to modify specifications without notice.
Non-binding pictures. Pictures : DieFrau / L'Atelier Sylvain Madelon / Nicolas Reynaud. SCLC - 01/09/2025 - v5

PCCG1316 EN



3 544058 724091