

MAGICO S3 MKII USER'S GUIDE





A MESSAGE FROM ALON WOLF:

THANK YOU FOR PURCHASING THE MAGICO S3 MKII LOUDSPEAKERS.

THE S3 MKII INCORPORATES ALL WE HAVE LEARNED IN THE PAST 23 YEARS ABOUT LOUDSPEAKER DESIGN AND MANUFACTURING. LIKE ALL MAGICO LOUDSPEAKERS, THE S3 MKII IS A PRECISION INSTRUMENT FOR MUSIC REPRODUCTION. PROPERLY SET UP AND MAINTAINED, IT WILL PROVIDE YOU WITH A GREAT MUSICAL EXPERIENCE FOR MANY YEARS.

BEFORE UNPACKING AND PLAYING YOUR SPEAKERS, PLEASE READ THE FOLLOWING MANUAL FULLY. IT WILL PROVIDE YOU WITH DIRECTIONS FOR PROPERLY SETTING UP, POSITIONING, CONNECTING, AND CARING FOR YOUR SPEAKERS. FOLLOWING THESE INSTRUCTIONS WILL ENSURE A SMOOTH INSTALLATION AND OPTIMUM SPEAKER PERFORMANCE.

IF YOU HAVE ANY QUESTIONS, PLEASE CONTACT YOUR AUTHORIZED MAGICO DEALER. MAGICO MAINTAINS A NETWORK OF DEDICATED DISTRIBUTORS WHO WILL BE ABLE TO HELP YOU, SHOULD YOU HAVE ANY PROBLEMS YOUR DEALER CANNOT RESOLVE. FOR THE LATEST INFORMATION ON ALL MAGICO PRODUCTS, PLEASE VISIT OUR WEBSITE, WWW.MAGICO.NET.

I WISH YOU MANY HOURS OF LISTENING PLEASURE.

KINDEST REGARDS,

ALON WOLF, CEO
MAGICO, LLC

WARNING



- THE S3 MKII USES A TWEETER EQUIPPED WITH A DIAMOND COATED BERYLLIUM DOME, ALLOWING A FREQUENCY RANGE EXTENDING BEYOND 40kHz. IN ITS SOLID FORM, BERYLLIUM IS HARMLESS. HOWEVER, DUE TO ITS NATURE, CERTAIN SPECIAL PRECAUTIONS SHOULD BE OBSERVED TO AVOID EXPOSURE TO UNNECESSARY RISK. SUCH AS:
 - UNDER NO CIRCUMSTANCES SHOULD THE BERYLLIUM DOME BE SUBJECTED TO ANY FORM OF ABRASIVE ACTION.
 - IN THE UNLIKELY CASE OF DAMAGE TO THE DOME, OF ANY FORM, A WIDE PIECE OF ADHESIVE TAPE SHOULD BE IMMEDIATELY USED TO SEAL THE WHOLE FRONT SURFACE OF THE TWEETER. YOU SHOULD THEN INFORM THE DEALER WHO YOU PURCHASED THE PRODUCT FROM, SO THAT THE TWEETER CAN BE REMOVED AND REPLACED BY A PROFESSIONAL.
 - IF THE DOME IS DAMAGED IN ANY CAUSING LOOSE PARTICLES OF BERYLLIUM, THESE SHOULD BE CAREFULLY COLLECTED WITH THE USE OF ADHESIVE TAPE, PLACED IN A SEALABLE BAG, AND RETURNED ALONG WITH THE TWEETER.

MAGICO S3 MKII USER'S GUIDE

1. **WARNING:** UNDER NO CIRCUMSTANCES SHOULD YOU ATTEMPT TO MOVE OR TRANSPORT THIS SPEAKER BY PUSHING IT FROM THE REAR. APPLYING FORCE TO THE REAR OF THE SPEAKER WILL TIP THE SPEAKER OVER AND DAMAGE IT. THE FOLLOWING TOOLS ARE REQUIRED: A BOXCUTTER OR KNIFE, AND A $\frac{3}{4}$ " CRESCENT WRENCH. FOR M-COAT MODELS, TOOLS REQUIRED ARE A $\frac{9}{16}$ " SOCKET OR WRENCH, A $\frac{3}{4}$ " SOCKET OR WRENCH, AND A PRY BAR.



2. UNBOX THE S3 MKII ACCESSORY KIT. THIS KIT WILL CONTAIN:

- A MAGICO MICROFIBER TOWEL
- A MAGICO WARRANTY CARD
- A MAGICO USB DRIVE WITH USER MANUAL AND WARRANTY INFORMATION
- (8) FLOOR SAVERS
- (8) S3 MKII SPIKES
- (8) S3 MKII SPIKE LOCK NUTS




UNPACKING INSTRUCTIONS (M-CAST FINISH)

3. POSITION THE S3 MKII BOX IN A SPACIOUS AND CLEAN ENVIRONMENT.



4. USING THE BOXCUTTER/BLADE, CAREFULLY OPEN THE S3 MKII BOX AND FOLD THE BOX FLAPS DOWN.

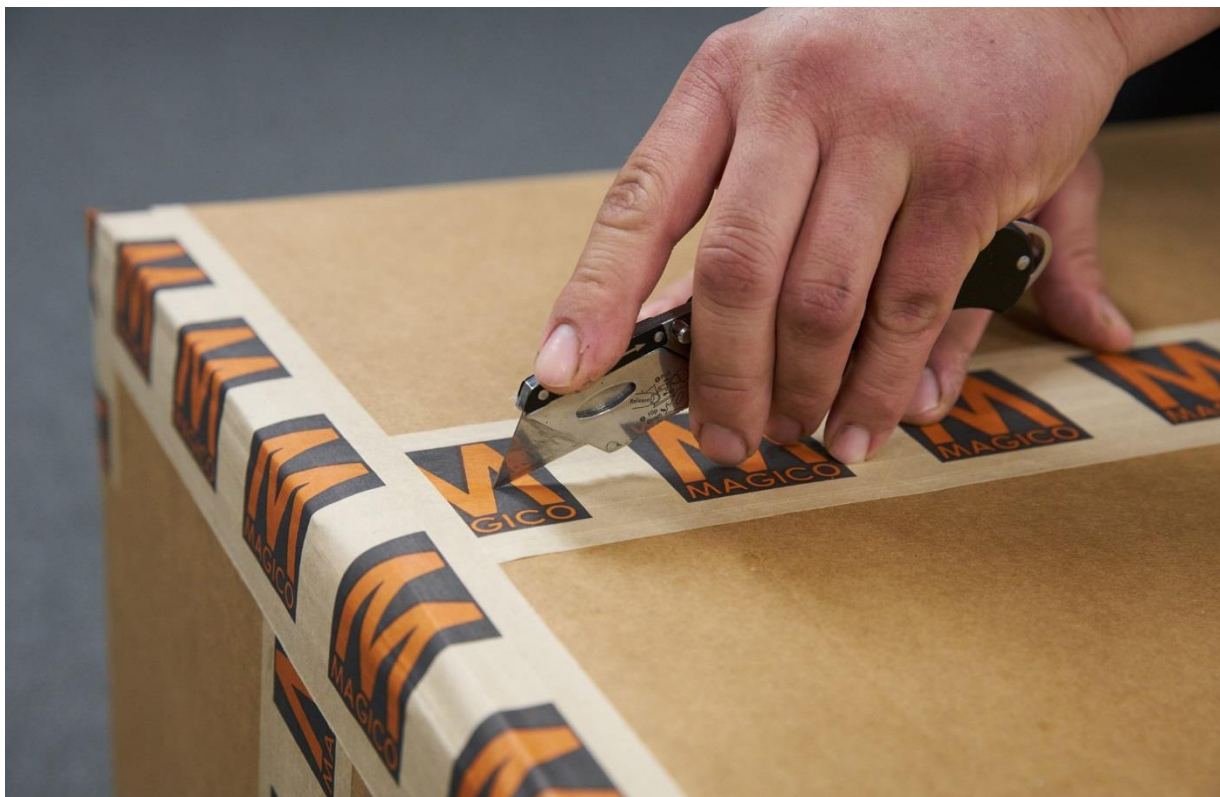


5. REMOVE THE PROTECTIVE HEX PAD




6. CAREFULLY REMOVE THE GRILL FROM THE PROTECTIVE FOAM.



7. REMOVE THE PROTECTIVE FOAM FROM THE TOP, MIDDLE, AND BOTTOM OF THE SPEAKER.

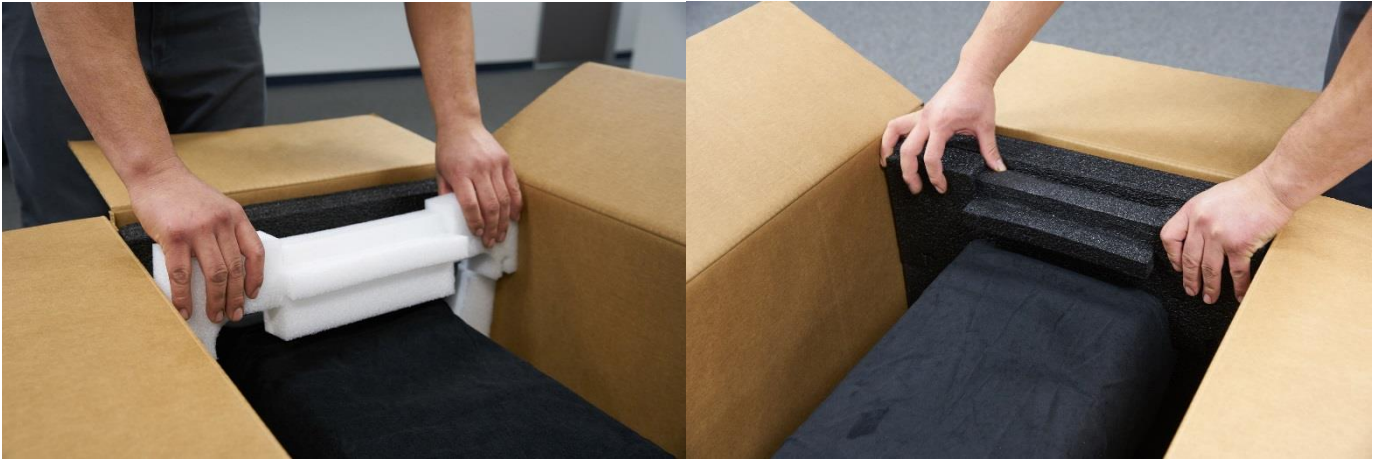

8. WITH A PERSON AT BOTH ENDS OF THE SPEAKER, CAREFULLY LIFT AND REMOVE THE SPEAKER FROM THE BOX.

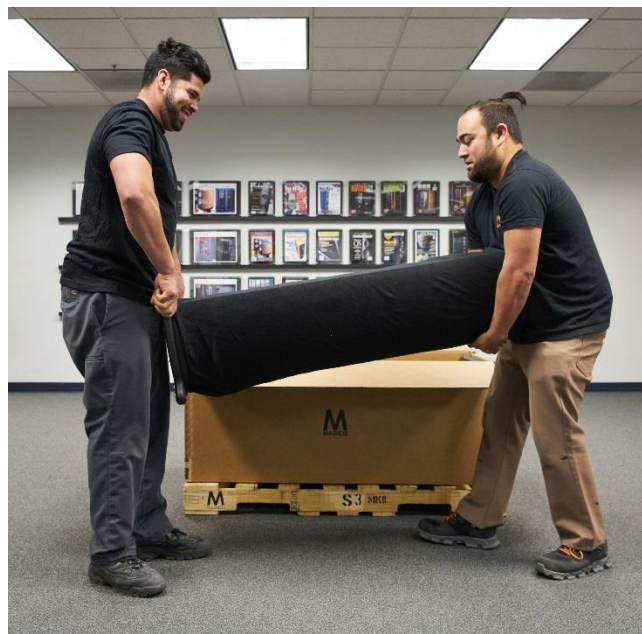

9. GENTLY LET THE SPEAKER DOWN SO THAT IT IS STANDING ON ITS PUCKS.



10. CAREFULLY REMOVE THE BLACK FELT COVER.



11. REMOVE THE BLUE TAPE AND TWEETER PROTECTIVE FOAM.



12. THREAD THE LOCK NUT ON TO THE SPIKE TO PREPARE IT FOR INSTALLATION.



13. TWO PEOPLE REQUIRED. WITH THE SPEAKER SITTING FIRMLY ON THE FLOOR, ONE PERSON (STANDING) TO ONE SIDE SHOULD LEAN THE SPEAKER TOWARD THEM ALLOWING ENOUGH TILT FOR THE SECOND PERSON (KNEELING) TO INSTALL THE THREADED SPIKE INTO THE RECEIVER PUCK. CAREFUL THREAD ALIGNMENT IS REQUIRED FOR THIS PROCEDURE.





14. REPEAT THIS PROCEDURE UNTILL ALL (4) SPIKES ARE INSTALLED.



15. (OPTIONAL: FOR USERS WITH HARDWOOD FLOORS / TWO PEOPLE REQUIRED) WITH THE SPIKED SPEAKER SITTING FIRMLY ON THE FLOOR, ONE PERSON (STANDING) TO ONE SIDE SHOULD LEAN THE SPEAKER TOWARD THEM ONLY ENOUGH TO ALLOW THE SECOND PERSON (KNEELING) TO SLIDE A FLOOR SAVER DISC UNDERNEATH BOTH LIFTED SPIKES AND ALIGN THE SPIKE TIPS INTO THE CENTER HOLE OF EACH FLOOR SAVER DISC.



16. ADJUST THE SPIKES BY THREADING/UNTHREADING THEM TO LEVEL THE SPEAKER AND TIGHTEN THE LOCK NUT AGAINST THE PUCK TO LOCK THE SPIKE IN POSITION. REPEAT THIS PROCEDURE FOR ALL SPIKES.

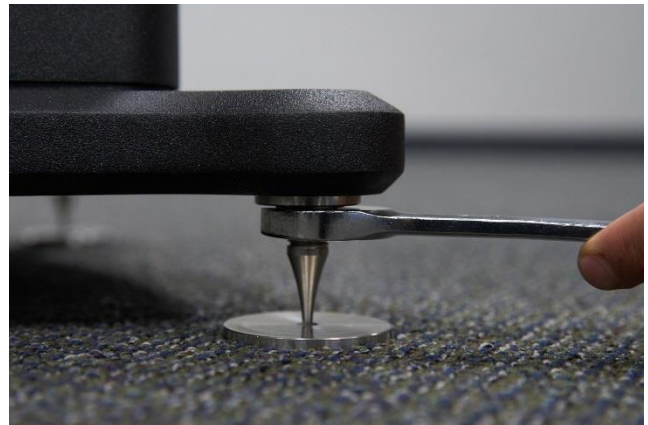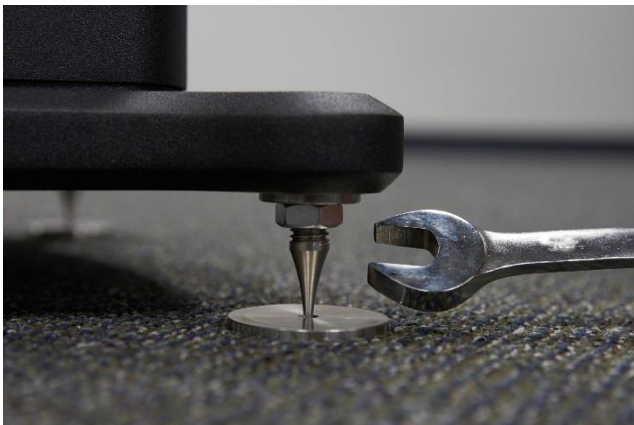

17. (OPTIONAL) USERS MAY CHOOSE TO INSTALL THE GRILL, CAREFULLY HOLD THE GRILL UP TO THE FRONT OF THE S3 MKII UNTILL ITS FASTENING MAGNETS ENGAGE.



UNPACKING INSTRUCTIONS (M-COAT FINISH)

1. POSITION THE S3 MKII CRATE IN A SPACIOUS AND CLEAN ENVIRONMENT.



2. USING A PRY BAR, CAREFULLY REMOVE THE CLAMPS FROM THE TOP AND SIDES OF THE CRATE.



3. WITH THE CLAMPS REMOVED, CAREFULLY REMOVE THE CRATE DOOR AND SET IT ASIDE.




4. CAREFULLY REMOVE THE TOP OF THE CRATE AND SET IT ASIDE.



5. CAREFULLY REMOVE THE GRILL FROM THE CRATE.



6. USING A 9/16" SOCKET OR WRENCH REMOVE THE FASTENERS SECURING THE CRATE WALLS TO THE CRATE BASE. HAVE TWO PEOPLE LIFT THE CRATE WALLS UP AND AWAY FROM THE S3 MKII AND BASE.

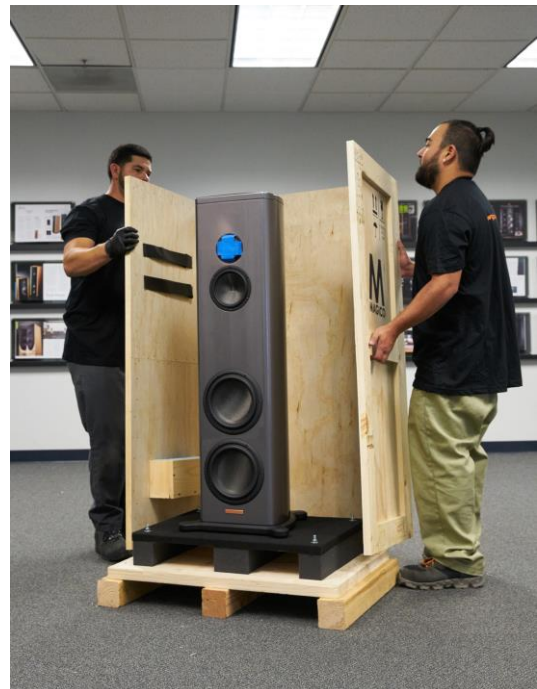


7. LOCATE THE S3 MKII CRATE-TO-FOOT FASTENERS ON THE UNDERSIDE OF THE WOODEN BASE. USING A $\frac{3}{4}$ " WRENCH OR SOCKET, CAREFULLY REMOVE ALL (4) OF THESE FASTENERS.



8. CAREFULLY TILT THE S3 MKII BACKWARDS, MAINTAINING CONSTANT CONTACT WITH THE CABINET. HAVE A SECOND PERSON LIFT FROM THE S3 MKIIS BASE PLATE OUTRIGGERS.




9. CAREFULLY SET THE S3 MKII DOWN AWAY FROM THE CRATE BASE.

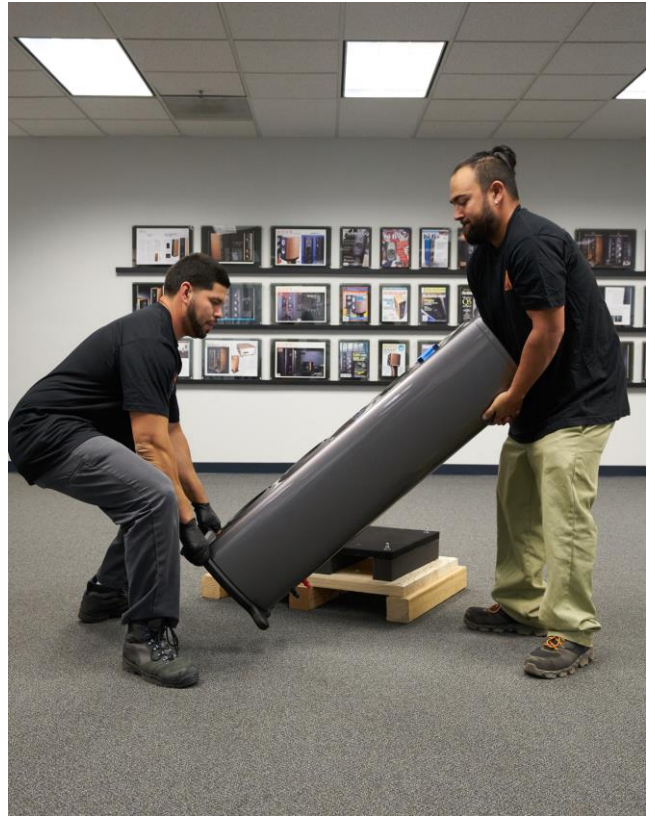

10. REMOVE THE BLUE TAPE AND TWEETER PROTECTIVE FOAM.



11. THREAD THE LOCK NUT ON TO THE SPIKE TO PREPARE IT FOR INSTALLATION.

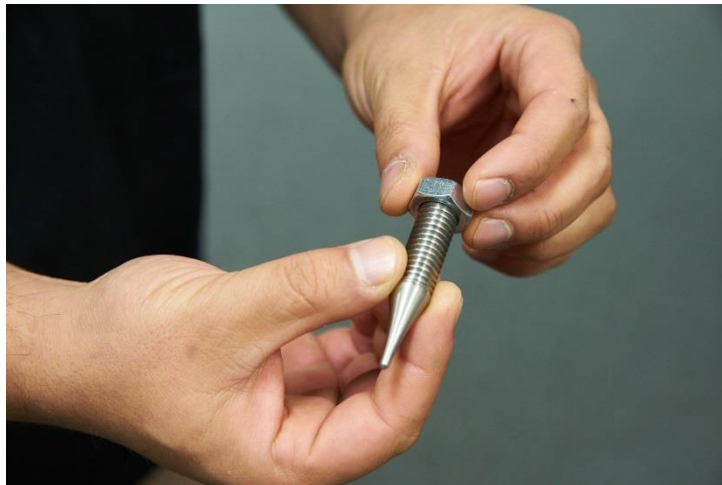

12. TWO PEOPLE REQUIRED. WITH THE SPEAKER SITTING FIRMLY ON THE FLOOR, ONE PERSON (STANDING) TO ONE SIDE SHOULD LEAN THE SPEAKER TOWARD THEM ALLOWING ENOUGH TILT FOR THE SECOND PERSON (KNEELING) TO INSTALL THE THREADED SPIKE INTO THE RECEIVER PUCK. CAREFUL THREAD ALIGNMENT IS REQUIRED FOR THIS PROCEDURE.





13. REPEAT THIS PROCEDURE UNTILL ALL (4) SPIKES ARE INSTALLED.



14. (OPTIONAL: FOR USERS WITH HARDWOOD FLOORS / TWO PEOPLE REQUIRED) WITH THE SPIKED SPEAKER SITTING FIRMLY ON THE FLOOR, ONE PERSON (STANDING) TO ONE SIDE SHOULD LEAN THE SPEAKER TOWARD THEM ONLY ENOUGH TO ALLOW THE SECOND PERSON (KNEELING) TO SLIDE A FLOOR SAVER DISC UNDERNEATH BOTH LIFTED SPIKES AND ALIGN THE SPIKE TIPS INTO THE CENTER HOLE OF EACH FLOOR SAVER DISC.



15. ADJUST THE SPIKES BY THREADING/UNTHREADING THEM TO LEVEL THE SPEAKER AND TIGHTEN THE LOCK NUT AGAINST THE PUCK TO LOCK THE SPIKE IN POSITION. REPEAT THIS PROCEDURE FOR ALL SPIKES.

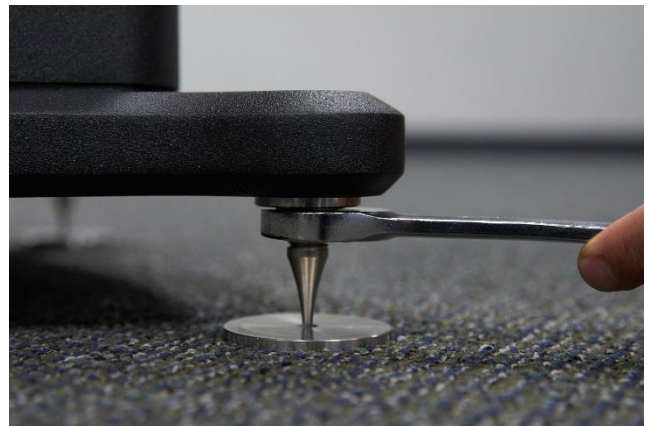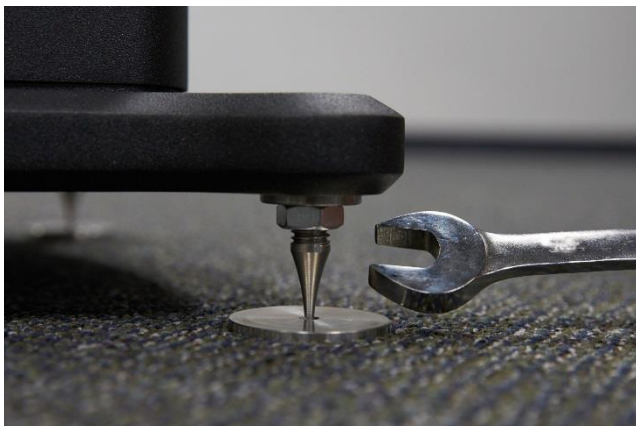

16. (OPTIONAL) USERS MAY CHOOSE TO INSTALL THE GRILL, CAREFULLY HOLD THE GRILL UP TO THE FRONT OF THE S3 MKII UNTILL ITS FASTENING MAGNETS ENGAGE.



SPEAKER PLACEMENT AND POSITIONING

THE MAGICO S3 MKII LOUDSPEAKERS ARE PRECISION INSTRUMENTS FOR MUSIC REPRODUCTION. AS SUCH, PROPER CARE AND ATTENTION TO DETAIL WHEN SETTING UP THESE SPEAKERS WILL YIELD THE MAXIMUM PERFORMANCE, REGARDLESS OF THE PARTICULAR ROOM. FOLLOWING THESE SET-UP GUIDELINES WILL ENSURE THE SPEAKERS ARE PROPERLY POSITIONED TO DELIVER THE OPTIMUM LISTENING EXPERIENCE. ALL THAT IS REQUIRED IS A TAPE MEASURE, A PEN, A CALCULATOR, A BALL OF STRING, A COUPLE OF DEMO CDS, AND SOME PATIENCE.

PLACEMENT—S3 MKIIS IN RELATION TO BACK AND SIDE WALLS

BEFORE YOU BEGIN: LOOK FOR OBVIOUS IMPEDIMENTS INCLUDING ANYTHING THAT COULD IMPEDE OR DIMINISH THE SOUND—E.G., OTHER SPEAKERS, AMPLIFIERS, EQUIPMENT RACKS, ANYTHING ON THE WALL THAT COULD CAUSE A REFLECTION, A SEVERE MISMATCH IN QUALITY AMONG INDIVIDUAL COMPONENTS, AND UNNECESSARY OR POORLY RUN SPEAKER/INTERCONNECT CABLES.

BASS—DISTANCE FROM REAR WALL

THE INITIAL PLACEMENT SHOULD BE APPROXIMATELY 20 INCHES (1/2 M) FROM THE BACK OF THE LOUDSPEAKER TO THE BACK WALL. SINCE WE HAVE SHORT AUDITORY MEMORY, THE SELECTED DEMO MUSIC CUT SHOULD BE BRIEF—30 SECONDS – 1 MINUTE MAX. IT SHOULD BE A WELL RECORDED JAZZ CUT WITH GOOD BASS GUITAR OR PERCUSSION. WHAT WE ARE LISTENING FOR AT THIS TIME IS THE DEFINITION OF THE BASS AND THE RIGHT SENSE OF PROPORTION.

NEXT, MOVE THE SPEAKER 6 – 8 INCHES (15 – 20 CM) FORWARD AND REPEAT THE LISTENING PROCESS. REPEAT THIS PROCESS, MOVING THE LOUDSPEAKER FORWARD IN 6 – 8 INCH (15-20 CM) INCREMENTS. WHEN YOU REACH THE POINT FROM WHICH MOVING THE SPEAKER FORWARD SOUNDS WORSE THAN THE PREVIOUS LISTENING POINT, MOVE THE LOUDSPEAKER BACK TO THIS POSITION AND MARK THIS DISTANCE FROM THE REAR WALL.

MIDRANGE—PLACEMENT IN RELATION TO SIDE WALLS FOR LATERAL PLACEMENT

BEGIN BY DIVIDING THE ROOM WIDTH BY 14. INITIAL PLACEMENT OF THE LOUDSPEAKERS WILL BE AT 3 AND 11. THE DISTANCE FROM THE LOUDSPEAKER TO THE EARS HAS TO BE PRECISELY EQUAL. THIS MEASUREMENT IS CRITICAL. THE MUSIC FOR THIS PROCESS SHOULD BE A FEMALE VOICE AND PIANO. WE ARE LISTENING FOR THE IMAGE OF HER VOICE TO BE FOCUSED. THE RULE FOR THE TOE-IN IS TO PICK A POINT APPROXIMATELY 1 – 2 FEET (. M) BEHIND THE LISTENER'S HEAD. TOE THE

LOUDSPEAKERS IN TO INTERSECT AT THAT POINT. IF THE SOUND IS TOO BRIGHT, TOE THE SPEAKERS OUT A LITTLE MORE. IF THE SOUND IS TOO DULL, TOE THE SPEAKERS IN A LITTLE MORE. REPEAT THE ABOVE PROCESS WITH THE LOUDSPEAKERS AT THE 4 AND 10 POSITION. THEN REPEAT, ONCE AGAIN WITH THE SPEAKERS AT THE 5 AND 9 POSITION.

SUMMARY

ONCE THE INITIAL PROCESS HAS BEEN COMPLETED, RETURN TO THE BASS SET-UP TO ENSURE THAT THE LOUDSPEAKERS ARE THE PROPER DISTANCE FROM THE BACK WALL. WHEN THE PROCESS HAS BEEN COMPLETED, MARK THE SPEAKER LOCATION WITH TAPE SO THAT THE SPEAKERS CAN BE RETURNED THERE FOR FURTHER LISTENING.

POSITIONING—S3 MKIIS IN RELATION TO THE LISTENER

- THE SPEAKERS AND THE LISTENER SHOULD FORM AN ISOSCELES TRIANGLE.
- THE LISTENER SHOULD BE EXACTLY EQUIDISTANT BETWEEN THE TWO LOUDSPEAKERS. THE BEST WAY TO DETERMINE THIS IS WITH A PIECE OF STRING. PICK A FIXED SPOT AT THE LISTENING POSITION. RUN THE STRING FROM THIS SPOT TO THE FRONT OF THE TWEETER OF THE LEFT SPEAKER. REPEAT THE PROCESS FOR THE RIGHT SPEAKER. IT IS CRITICALLY IMPORTANT TO KEEP THIS DISTANCE PRECISELY THE SAME.

CONNECTIONS

CONNECTIONS SHOULD BE MADE WITH ALL ELECTRONIC EQUIPMENT (AMPLIFIERS, PREAMPLIFIERS) TURNED OFF. THERE ARE TWO TERMINALS AT THE BACK OF THE SPEAKER. THE TERMINALS ARE INSULATED TO ACCEPT A VARIETY OF CABLE TERMINATIONS FOR MOST APPLICATIONS AND TO PREVENT ANY LIKELIHOOD OF ELECTRICAL SHOCK, EVEN WHEN THE SPEAKERS ARE USED WITH THE HIGHEST POWERED AMPLIFIERS. DO NOT USE TOOLS TO TIGHTEN THE BINDING POSTS.

BREAK-IN

A LOUDSPEAKER IS A MECHANICAL DEVICE AND AS SUCH REQUIRES AN EXTENDED INITIAL PERIOD OF NORMAL USE DURING WHICH A NOTICEABLE IMPROVEMENT IN SOUND QUALITY WILL OCCUR. DO NOT ATTEMPT TO ACCELERATE THE BREAK-IN PROCESS BY PLAYING SINE WAVES, TONE SWEEPS, BREAK-IN CDS OF ANY SORT, OR OTHER GENERATED SIGNALS.

CARE:

FOR ALUMINUM PANELS USE A LINT-FREE SOFT CLOTH (PROVIDED IN ACCESSORY KIT). FOR PAINTED SURFACES, USE A PRODUCT SUCH AS MEGUIAR'S PROFESSIONAL FINAL INSPECTION 34. DO NOT USE CLEANERS THAT CONTAIN AMMONIA, STRONG SOLVENTS, OR ABRASIVE MATERIALS. USE OF THESE CLEANERS CAN DEGRADE, SCRATCH, OR DESTROY THE FINISH.

SPECIFICATIONS

DESCRIPTION: 3-WAY SEALED BOX ENCLOSURE

DRIVER COMPLEMENT:

1" MBD7 Diamond Coated Beryllium Dome

6" M390G XG Nanographene Cone

9" M905G XG Nanographene Cone (x2)

SENSITIVITY: 88dB

IMPEDANCE: 4 Ohms

FREQUENCY RESPONSE: 24 Hz – 50 kHz

RECOMMENDED POWER: 50 - 1000 WATTS

DIMENSIONS: 48" H x 12" D x 12" W (122cm x 30cm x 30cm)

WEIGHT: *approx.* 170 lbs. (77 kg.)

LIMITED WARRANTY

DEAR MAGICO PURCHASER,

THIS PRODUCT HAS BEEN DESIGNED AND MANUFACTURED TO THE HIGHEST QUALITY STANDARDS. HOWEVER, IF SOMETHING DOES GO WRONG WITH THIS PRODUCT, MAGICO, LLC AND ITS NATIONAL DISTRIBUTORS WARRANT THE REPLACEMENT OF DEFECTIVE PARTS INCLUDING LABOR (EXCLUSIONS MAY APPLY) IN ANY COUNTRY SERVED BY AN OFFICIAL MAGICO, LLC DISTRIBUTOR. THIS LIMITED WARRANTY IS VALID FOR A PERIOD OF 5 YEARS FROM THE DATE OF PURCHASE.

TERMS AND CONDITIONS

1. THE WARRANTY IS LIMITED TO THE REPAIR OF THE EQUIPMENT. IN THE EVENT THAT THIS LOUDSPEAKER REQUIRES SERVICE, THE CUSTOMER MUST FIRST OBTAIN A RETURN AUTHORIZATION FROM MAGICO OR ITS AUTHORIZED DISTRIBUTOR. THE CUSTOMER IS RESPONSIBLE FOR RETURNING THE LOUDSPEAKER TO MAGICO OR ITS AUTHORIZED DISTRIBUTOR. IN THE EVENT THAT THE REPAIR IS DETERMINED TO BE UNDER WARRANTY, MAGICO WILL RETURN THE LOUDSPEAKER TO THE CUSTOMER AT NO CHARGE. EXCEPT AS INDICATED, NEITHER TRANSPORTATION, SHIPPING, NOR ANY OTHER COSTS, NOR ANY RISK FOR REMOVAL, TRANSPORTATION AND INSTALLATION OF PRODUCTS IS COVERED BY THIS WARRANTY.

2. WITH THE EXCEPTION EXPLAINED BELOW, THIS WARRANTY IS ONLY VALID FOR THE ORIGINAL OWNER. IT IS NOT TRANSFERABLE. IT IS VALID ONLY WHEN PURCHASED FROM AN AUTHORIZED MAGICO DEALER. A VALID RECEIPT SHOWING THE PURCHASER'S NAME, DATE OF PURCHASE, AND DEALER INFORMATION MUST BE SUBMITTED WITH ALL WARRANTY CLAIMS.

3. IN THE EVENT THAT THIS LOUDSPEAKER IS PURCHASED AS A USED OR TRADE-IN LOUDSPEAKER FROM AN AUTHORIZED MAGICO DEALER OR DISTRIBUTOR, THE SECOND OWNER SHALL RECEIVE THE BALANCE OF THE ORIGINAL WARRANTY BASED UPON THE ORIGINAL DATE OF PURCHASE. VALID RECEIPTS SHOWING THE PURCHASER'S NAME, DATE OF PURCHASE, AND DEALER INFORMATION FOR THE CURRENT OWNER AND THE ORIGINAL PURCHASE MUST BE SUBMITTED WITH ALL WARRANTY CLAIMS.

4. THIS WARRANTY WILL NOT BE APPLICABLE IN CASES OTHER THAN DEFECTS IN MATERIALS AND/OR WORKMANSHIP AT THE TIME OF PURCHASE AND WILL NOT BE APPLICABLE FOR DAMAGES CAUSED BY INCORRECT INSTALLATION, CONNECTION OR PACKING, FOR DAMAGES CAUSED BY ANY USE OTHER THAN CORRECT USE DESCRIBED IN THE USER MANUAL, NEGLIGENCE, MODIFICATIONS, OR USE OF PARTS THAT ARE NOT MADE OR AUTHORIZED BY MAGICO, LLC, FOR DAMAGES CAUSED BY FAULTY OR UNSUITABLE ANCILLARY EQUIPMENT, FOR DAMAGES CAUSED BY ACCIDENTS, LIGHTNING, WATER, FIRE HEAT, EXTREME WEATHER CONDITION, WAR, PUBLIC DISTURBANCES OR ANY OTHER CAUSE BEYOND THE REASONABLE CONTROL OF MAGICO, LLC AND ITS APPOINTED DISTRIBUTORS, FOR PRODUCTS WHOSE SERIAL NUMBER HAS BEEN ALTERED, DELETED, REMOVED OR MADE ILLEGIBLE, IF REPAIRS OR MODIFICATIONS HAVE BEEN EXECUTED BY AN UNAUTHORIZED PERSON.

5. THIS GUARANTEE COMPLEMENTS ANY NATIONAL/REGIONAL LAW OBLIGATIONS OF DEALERS OR NATIONAL DISTRIBUTORS AND DOES NOT AFFECT YOUR STATUTORY RIGHTS AS A CUSTOMER.

6. UNAUTHORIZED DISMANTLING OF THIS PRODUCT WILL RENDER THIS WARRANTY VOID.

7. MAGICO, LLC STRIVES TO MANUFACTURE THE VERY FINEST POSSIBLE EQUIPMENT, AND THEREFORE RESERVES THE RIGHT TO MAKE CHANGES OR IMPROVEMENTS WITHOUT NOTICE.

SERIAL NUMBERS

PLEASE TAKE THE TIME TO RECORD YOUR SPEAKERS' SERIAL NUMBERS BELOW.

DISCLAIMER

MAGICO, LLC CREATED THIS MANUAL AND THE CONTAINED INFORMATION AVAILABLE ON AN "AS IS" BASIS. ALL WARRANTIES AND REPRESENTATIONS OF ANY KIND WITH REGARD TO SAID INFORMATION IS DISCLAIMED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR USE. UNDER NO CIRCUMSTANCES WILL MAGICO, LLC, OR ANY OF ITS OFFICERS OR EMPLOYEES BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL, SPECIAL OR EXEMPLARY DAMAGES EVEN IF APPRISED OF THE LIKELIHOOD OF SUCH DAMAGES OCCURRING. MAGICO, LLC DOES NOT WARRANT THE INFORMATION AGAINST DEFICIENCIES OF ANY KIND.

MAGICO, LLC
3170 CORPORATE PLACE
HAYWARD, CA 94545
USA
PHONE: +1.510.649.9700
FAX: +1.510.323.4774
EMAIL: INFO@MAGICO.NET
BUSINESS HOURS: 8AM - 4PM PACIFIC TIME



© 2016 MAGICO, LLC